

# Trident 285

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Natural latex
- **Length (inches)** 23.62
- **Thickness (inches)** 0.039
- **Wrist** Rolled cuff
- **Colour/Color** Blond
- **Interior finish** Chlorinated
- **Exterior finish** Reinforced grip
- **Size / EAN** 8 9 10
- **Packaging** 1 pair/bag - 30 pairs/carton
- **Complementary information** Guaranteed without silicone



## PERFORMANCE RESULTS

Certification category 3

CE 0334



ABKL


2131

### Legends



**MECHANICAL HAZARDS**  
EN 388

PERFORMANCE LEVELS

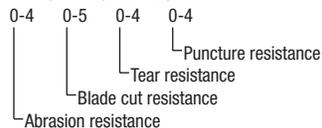

**LOW CHEMICAL PROTECTION**  
EN 374



**MICRO-ORGANISMS**  
EN 374




**RADIOACTIVE CONTAMINATION**  
EN 421



**HEAT AND FIRE**  
EN 407

PERFORMANCE LEVELS

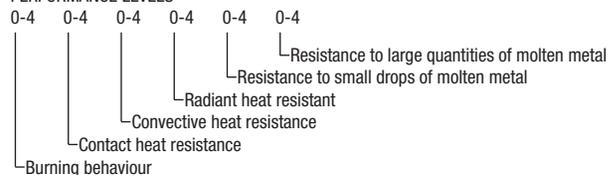


**SPECIFIC CHEMICAL PROTECTION**  
EN 374

| Letter Code | Chemical product     |
|-------------|----------------------|
| A           | Methanol             |
| B           | Acetone              |
| C           | Acetonitrile         |
| D           | Dichloromethane      |
| E           | Carbon Disulfide     |
| F           | Toluene              |
| G           | Diethylamine         |
| H           | Tetrahydrofurane     |
| I           | Ethyl acetate        |
| J           | n-Heptane            |
| K           | Sodium hydroxide 40% |
| L           | Sulphuric acid 96%   |



**COLD HAZARDS**  
EN 511

PERFORMANCE LEVELS

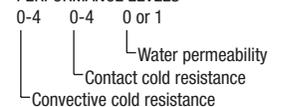

For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**  
PROFESSIONAL  
[www.mapa-pro.com](http://www.mapa-pro.com)

# Trident 285

## DESCRIPTION AND GENERAL PROPERTIES

- Longer service life and good impact protection, due to the thickness of the material
- Forearm protection. Length: 60cm

## MAIN FIELDS OF USE

### Other industries

- Maintenance in wet environments

### Mechanical industry

- Maintenance in wet environments (water, oil, greases, hydrocarbons)

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at the workplace may differ from the «CE»-type tests.
- It is not recommended for persons sensitised to natural latex, dithiocarbamates and thiazoles to use these gloves.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website [www.mapa-pro.com](http://www.mapa-pro.com) or contact the Technical Customer Service - MAPA PROFESSIONNEL ([stc.mapaspontex@mapaspontex.fr](mailto:stc.mapaspontex@mapaspontex.fr)) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

### Storage conditions

Store the gloves in their original packaging protected from direct sunlight, far from heat sources or electric equipment.

### Laundering conditions

Before taking off the gloves, clean them as appropriate :

- in use with a solvent (alcohol, etc...) : rub over with a dry cloth
- in use with detergents, acids or alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth

Caution : improper use of the gloves or submitting them to a cleaning or laundering process, which is not specifically recommended, can alter their performance levels.

### Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

## LEGISLATION

This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.

This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate

0072/014/162/02/98/0041

- Issued by the notified body nr

0072

I.F.T.H. – Av. guy de Collongue - F-69134 ECULLY CEDEX

- Quality assurance certificat

0334 Asqual 14 rue des Reculettes -F-75013 PARIS